

Definition chart





COMPANY :

Select your activity :

Project :

N° plan :

1 - M-Door product



2 - Electrical layout

For button :

Voltage : ☐ 12 V

☐ 24 V


☐ 72 V

☐ 110 V


☐ Other

Electrical layout :


☐ N°1




☐ N°2



☐ N°3



☐ N°4



Luminosity : ☐ Standard

☐ High

For indicator :

Voltage : ☐ 12 V

☐ 24 V

☐ 72 V

☐ 110 V


☐ Other

For buzzer:

Voltage : ☐ 72 V

☐ Other

Electrical layout :



	Frequency 1	Frequency 2	Particularity	J 1	J 2	J 3	J 4
PMR STEP OUT OF SERVICE	800 Hz \pm 15%		3 beats per second every 5 seconds	U	0	0	0
OPENING TRAVELLER DOOR	300 Hz \pm 500 Hz	1 750 Hz \pm 500 Hz	Slow chime 2 tonalities with 2 beats per second	0	U	0	0
	325 Hz			U	U	0	0
CLOSING TRAVELLER DOOR	1 900 Hz \pm 500 Hz		Fast chime 1 tonality with 6 beats per second	0	0	U	0
	500 Hz			U	0	U	0
	1 000 Hz		Signal of 0.25s separated by 0.75s	0	U	U	0
	2 400 Hz			U	U	U	0

3 - LED color :

Button : 2 colors max
Indicator : 1 color

Green

1st 2nd



Red

1st 2nd



Blue

1st 2nd



None

1st 2nd



Other

1st 2nd



4a - Actuator

Only for button P/N






[View range](#)


Material : ☐ Plastic flush ☐ Flush symbol
☐ Raised symbol
or
☐ Metal ☐ Flush actuator ☐ With lit hole ☐ Flush symbol
☐ Raised actuator ☐ Without lit hole ☐ Raised symbol

Color : ☐ Green ☐ Red ☐ Dark blue ☐ Yellow ☐ Grey light
☐ Black ☐ White ☐ Orange ☐ Decorative chrome
(only for metal version)

[View range](#)

Symbol :

☐  ☐  ☐  ☐ WC ☐ SOS ☐  ☐ 
☐ No symbol ☐ Other symbol

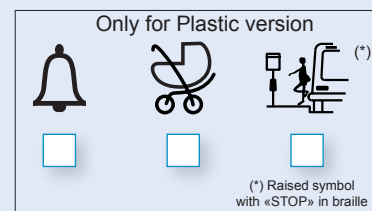

4b - Indicator

Symbol : ☐ No symbol ☐  ☐  ☐  ☐ 

5 - Bezel

Shape : ☐ Plastic round ☐ Plastic triangular (with SOS raised and braille)
☐ Metal round ☐ Metal round (with 2 areas for marking) ☐ Metal square

[View example](#)


Color : ☐ Green ☐ Red ☐ Dark blue ☐ Light blue ☐ Yellow
Except for Slim button
☐ Light grey ☐ Dark grey ☐ Orange ☐ Decorative chrome
(only for metal version)

[View example](#)

Color : ☐ Green ☐ Red ☐ Orange ☐ Yellow ☐ Black
For Slim button

6a - Cable position

Standard length = 170 mm
from back cover to
the end of moulding resin

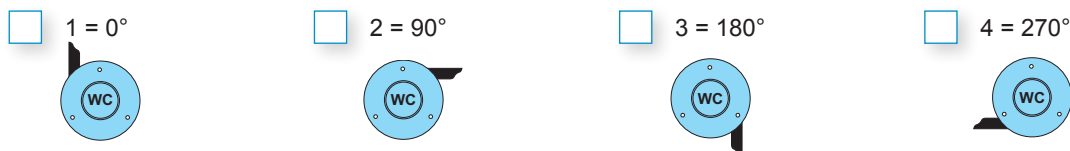

Other cable length :

6b - Connector


Type of connector :

For specific connection please provide a drawing.


7 - Mounting

For single sided button,
Indicator or buzzer :

☐ Front mounting



☐ Rear mounting
without bezel



Slim button : Front mounting

Other versions on request

Because of the constant evolution in standards and materials, the texts and images of this document do not constitute a contractual agreement.

471 Route de la Cuisinière - F-38 490 CHIMILIN - FRANCE - Ph. : +33 (0)4 76 32 07 33 - Fax : +33 (0)4 76 32 54 11
www.mafelec.fr - contact@mafelec.fr

Actuator

[Return](#)

Some examples from our product range :



Metal flush actuator
with raised symbol



Metal flush actuator
for flush symbol
with lit hole




Metal raised actuator
for flush symbol,
with lit hole



Metal raised actuator
with raised symbol



Metal raised actuator
with raised symbol
and lit hole



Plastic flush symbol



Plastic raised symbol



Plastic braille symbol

Actuator diameter : 40mm
Raised actuator : 3mm high
Raised symbol : 1mm high

Color

[Return](#)

The colors are only for indication because the rendering depending on the material (metal or plastic)



Red



Orange



Yellow



Green



White



Dark blue



Light blue



Dark grey



Light grey




Decorative chrome
(metal version only)

Bezel

[Return](#)


Plastic triangular shape
with braille



Metal round shape
with braille




Metal square shape

Dimensions (mm)

[Return](#)


Front mounting :




Square shape



Round shape



«Slim» shape



Triangular shape

Rear mounting :

